

FLUKE®

Fluke 345 Power Quality Clamp Meter

Quick, convenient troubleshooting for servicing and commissioning electronic switching loads



Fluke. *Keeping your world up and running.™*

Fluke Corporation
P.O. Box 9090
Everett, WA USA 98206

Fluke Europe B.V.
P.O. Box 1186
5602 BD Eindhoven
The Netherlands

For more information call:
In the U.S.A. (800) 443-5853
or Fax (425) 446 -5116

In Europe/M-East/Africa
+31 (0)40 2 675 200
or Fax +31 (0)40 2 675 222

In Canada (905) 890-7600
or Fax (905) 890-6866

From other countries +1 (425) 446 -5500
or Fax +1 (425) 446 -5116

Visit us on the worldwide web at:

www.fluke.com

Fluke (UK) Ltd.
52 Hurricane Way
Norwich
Norfolk
NR6 6JB
United Kingdom
Tel: (020) 7942 0700
Fax: (020) 7942 0701
E-mail: industrial@uk.fluke.nl

Web: www.fluke.co.uk

© Copyright 2007, Fluke Corporation. All rights reserved.
Printed in the Netherlands 02/07.
Data subject to alteration without notice.


Pub_ID: 11214-eng

Fluke 345 Power Quality Clamp Meter


FLUKE®



Fluke 345

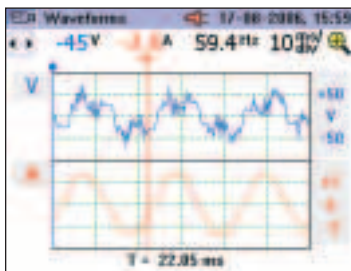

View waveforms for equipment checking and setup

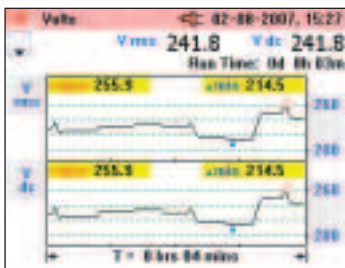

Log parameters over time to track down intermittent faults



Included Accessories

Soft carrying case, Power Log software, Test probes, Test leads, Alligator clips, International ac adapter / battery eliminator, Printed English User manual, Multi-language manual on CD

Ordering Information

Fluke 345 Power Quality Clamp Meter

The ideal troubleshooting tool for modern electrical loads

The Fluke 345 measures a wide range of electrical parameters for troubleshooting power disturbances in single- and three-phase electrical loads. With a bright color display to see waveforms and trends, a low-pass filter to remove high frequency noise, and a high EMC immunity design, the Fluke 345 is ideal for measurements on switching loads such as variable speed drives, electronic lighting and UPS systems.

- **High safety rating:** 600V CAT IV / 1000V CAT III rated for use at the service entrance
- **ac/dc current measurements:** Clamp-on measurement of ac current up to 1400 A rms and dc current up to 2000 A without breaking the circuit
- **Harmonic analysis:** Analyze, display and log harmonics up to the 30th harmonic (40th harmonic for 15 Hz to 22 Hz)
- **Verify batteries:** Direct measurement of dc ripple (%) for battery and dc systems

Specifications

(Check the Fluke web for detailed specifications)

Current measurement	
DC, DC rms, AC rms	All measurements dc and 15 Hz to 1 kHz. Maximum overload 10,000 A or RMS x frequency < 400,000. Amps rms is a true rms measurement (ac + dc).
Measuring range	0 - 2000 A dc or 1400 ac rms
Harmonics	All measurements up to 30th harmonic (40th harmonic for 15 Hz to 22 Hz); Frequency range F ₀ : 15 Hz to 22 Hz and 45 Hz to 65 Hz; I _{min} > 10A
Voltage measurement	
DC, DC rms, AC rms	All measurements dc and 15 Hz to 1 kHz. Maximum overload 1,000 V rms. Volts rms is a true-rms measurement (AC + DC).
Measuring range	0 - 825 V dc or ac rms
Harmonics	All measurements up to 30th harmonic; Frequency range F ₀ : 15 Hz to 22 Hz and 45 Hz to 65 Hz; V _{min} > 1V
Watts measurement (single- and three-phase)	
DC, DC rms, AC rms	
Measuring range	0 - 1650 kW dc or 1200 kW ac
VA measurement (single- and three-phase)	
DC, DC rms, AC rms	
Measuring range	0 -1650 kVA dc or 1200 kVA ac
VAR measurement (single- and three-phase)	
Measuring range	0 - 1250 kVAR
Power factor (single- and three-phase)	
Measuring range	0.3 cap...1.0... 0.3 ind (72.5° cap...0°... 72.5° ind)
Displacement power factor	
Measuring range	0.3 cap ... 1.0 ... 0.3 ind (72.5° cap ... 0° ... 72.5° ind)
Kilowatt Hour (kWhr)	
Measuring range	40,000 kWhr
Scope function	
Time base	2.5 ms, 5 ms, 10 ms, 25 ms, 50 ms/div
Current management:	
Ranges	10 A/20 A/40 A/100 A; 200 A/400 A/1000 A/2000 A
Voltage measurement:	
Ranges	4 V/10 V/20 V/40 V/100 V; 200 V/400 V/1000 V
Inrush current function	
All measurements dc and 15 Hz to 1 kHz	
Ranges	40, 400 and 2000 A
Memory	
Up to 50 screen shots and over 150,000 individual measurement values	

Power supply: 1.5 V Alkaline AA MN 1500 or IEC LR6 x 6 Battery
Battery life (typical): >10 hours (backlight on full); >12 hours (backlight reduced)
Safety: IEC 61010-1 600 V CAT IV, 1000V CAT III (maximum input phase-phase 825V rms) double or reinforced insulation, pollution degree 2
Protection: IP40; EN60529
Operating temperature: 0 °C to 50 °C

Display: Color transmissive LCD 320 x 240 pixels (70 mm diagonal) with 2 level backlight
Digital output: USB interface to a PC
Size (HxWxD): 300 mm x 98 mm x 52 mm
Jaw opening: 60 mm
Jaw capacity: 58 mm diameter
Weight (including batteries): 0.82 kg
Two Year Warranty

Recommended Accessories



TLK291



TP220



AC220



TP1



C550